

JIMCO®

UV-C & OZONE
Technology



DISINFECTION IN REEFER CONTAINERS & CARRIERS

ENVIRONMENTALLY FRIENDLY
AND CHEMICAL FREE



JIMCO.DK

CHOOSING THE RIGHT DISINFECTION TECHNOLOGY **IMPACTS** THE PERFORMANCE

The shelf life of food has always played an important role. For example, ethylene, mould and yeast shorten the time in which the food stays fresh. In the fruit industry, among other places, mould and yeast growth is a tough opponent affecting product lifespan.

The JIMCO FLO-D® Mini uses UV-C Technology to kill the bacteria, mould and yeast in the cold storage, hence optimizing the lifespan of fruits in and will help revolutionize the way fruit is stored and transported.

SAVE MONEY

TREATMENT WITH & WITHOUT UV-C PRODUCED OZONE

With ozone



GRAPES

Without ozone



With ozone




STRAWBERRIES


Without ozone



ORANGES



TOMATOES



- ✓ PLC controlled units with datalogging, do not require additional manpower.
- ✓ Access point for wireless connection by smartphone or tablet.
- ✓ Loud alarm before treatment start – in 8 different languages.
- ✓ New weekly treatment programme mode.

The JIMCO FLO-D Mini is easy to move around and can be used in multiple containers, each with separate datalogging.

Naming of each FLO-D unit and location for disinfection documentation.

- ✓ Avoid time-consuming manual disinfection with water and chemicals.
- ✓ Save litres of water by the tons as well as energy for heating and drying.
- ✓ Disinfect more efficiently in corners, chinks and ventilation ducts, cooling coils and surfaces.
- ✓ Avoid strong chemicals, which have an impact on the environment and work environment.
- ✓ Avoid an environmentally harmful release of chlorinated waste-water.

COOLING TRAILER TEST

The FLO-D Mini produces Ozone by draining the air in the room through the system's UV-C chamber where oxygen O₂ contained in the air is converted to ozone O₃.

The ozone then blows out and spread into the room.

1.


Ozone treatment in 3 hours with FLO-D Mini would reduce the amount of organic matter in which bacteria thrive and reproduce.

2.

That, without other means, we get an ozone flow through evaporating the unit, so that there is also a reduction of organic matter.

3.

Reduction or removal of odors.

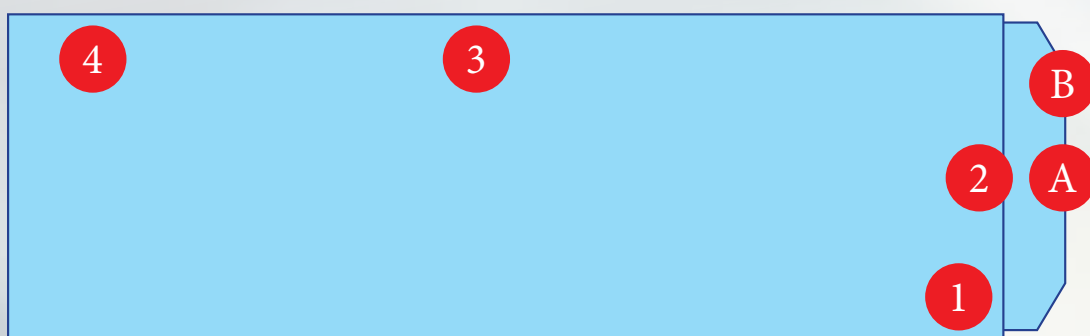

Position	Start ATP	15 seconds ATP	60 seconds ATP	Remarks
1	2463	101	71	OK
2	2471	111	9	OK
3	2788	90	62	OK
4	1786	106	56	OK
A	1216	106	75	OK
B	1556	199	87	OK

There was a **SIGNIFICANT** reduction of fish smell after treatment, the trailer was left in the workshop overnight, which without ozone treatment usually means no one can keep the smell of fish out at the workshop and it is normal practice to pull chees / fishing trailers out at night.

Test settings for the FLO-D Mini:

Blower speed 80%, Ozone measurement upper ozone limit 9 ppm lower limit 8 ppm - hours ON - 03 hours 00 minutes.

TECHNICAL DESCRIPTION

FLO-D® MINI - Mark 2

UV-lamps: 8 pcs. 70 watt

Quartz sleeve: 8 pcs. (in cold storage)

Power supply EU: 1x230V + PE 50/60Hz, 10A

Power supply US: 1x115V + PE 50/60Hz, 10A

Consumption EU: 640 watt

Consumption US: 685 watt

Display: Proface PLC, color panel

Room-volume:

Disinfection: Up to 314 m³

Odor treatment: Up to 1.258 m³

Mesurements:

Height: 1150 mm · Width: 560 mm

Depth: 890 mm · Weight: 59 Kg





UV-C AND OZONE SOLUTIONS FOR THE FUTURE
EUROPE · SOUTH AMERICA · USA · ASIA · MIDDLE EAST

JIMCO TECHNOLOGY USERS



ELGIN BAY
UV-C & OZONE TECHNOLOGY

Contact: Matthew Cove (Director), ELGIN BAY UV-C & Ozone Technology
+44 (0) 7920 254379 | Matthewcove@elginbay.co.uk | www.elginbay.co.uk